KonOrg
Unternehmensgruppe

Technisches Datenblatt
Smart Line Digital Totem

Technical data sheet
Smart Line Digital Totem

Smart Line Digital Totem 32“
Smart Line Digital Totem 32“

- Optimal für Showrooms, Gastronomie etc.
  Optimal for showrooms, hospitality etc.
- Inklusive professionellem 43“ Samsung Bildschirm
  Includes professional 43“ Samsung screen
- Einfacher Transport
  Easy transport
- Standardfarbe schwarz oder weiß
  Standard colour black or white
- Sehr elegante und langlebige Stahlkonstruktion
  Very slim but durable steel construction
- Für den Inneneinsatz
  For Indoor use

38 KG

Produktbeschreibung
Product description

Digital Signage ist die moderne Art der Präsentation auf Ihrem Messestand oder am Point-of-Sale. Der digitale Kundenstopper überzeugt durch ein einfaches Handling, eine brillante Optik und ein modernes Design. Wechseln Sie nach Belieben Ihre Motive. Kosteneffizient, zeitgemäß und praktisch. Lieferumfang: Die digitale Stele besteht aus dem Stahlkörper mit Display und Standfuß sowie Anschlusskabel und Stecker. Material: Stahl. Anschlüsse: WLAN, LAN, USB.

Digital signage is the modern way of presenting at your trade fair stand or at the point of sale. The digital customer stopper impresses with its simple handling, brilliant optics and modern design. Change your motifs as you like. Cost-effective, contemporary and practical. Delivery: The digital stele consists of the steel body with display and stand as well as connection cable and plug. Material: steel. Connections: WLAN, LAN, USB.

- Digitaler Infokiosk / Digitale Stele
  Digital info kiosk / digital stele
- In schwarz oder weiß erhältlich, weitere Farben auf Anfrage
  Available in black or white, other colors on request
- Format: 57 x 181,3 x 46 cm
  Format: 57 x 181,3 x 46 cm
- USB-/ WLAN-Anschluss für eine einfache Übertragung digitaler Inhalte
  USB / WLAN connection for easy transfer of digital content
- Massiver Sockel (8 mm Stahlblech) bietet eine hohe Stabilität
  Solid base (8 mm sheet steel) offers high stability
- Übertragung digitaler Inhalte
  Transmission of digital content
- Stilvolles, rahmenloses Design
  Stylish, frameless design
- Höhere Auflagen auf Anfrage
  Higher editions on request
- Ideal für Ladenlokale, Gastronomie, Messestände uvm.
  Ideal for shops, restaurants, exhibition stands and much more. (Indoor use)
- Branding des Corpus auf Anfrage möglich
  Branding of the corpus possible on request
- Möglichkeit der Befestigung des Sockels am Boden mit Befestigungsschrauben
  Possibility of fastening the base to the floor with fastening screws

Produktabmessungen
Product dimensions

Rahmengröße (BxHxT): 436 x 1699 x 460 mm
Frame size (wxH): 436 x 1699 x 460 mm

Bildschirmgröße (BxH): 405 x 705 mm
Screen size (wxH): 405 x 705 mm

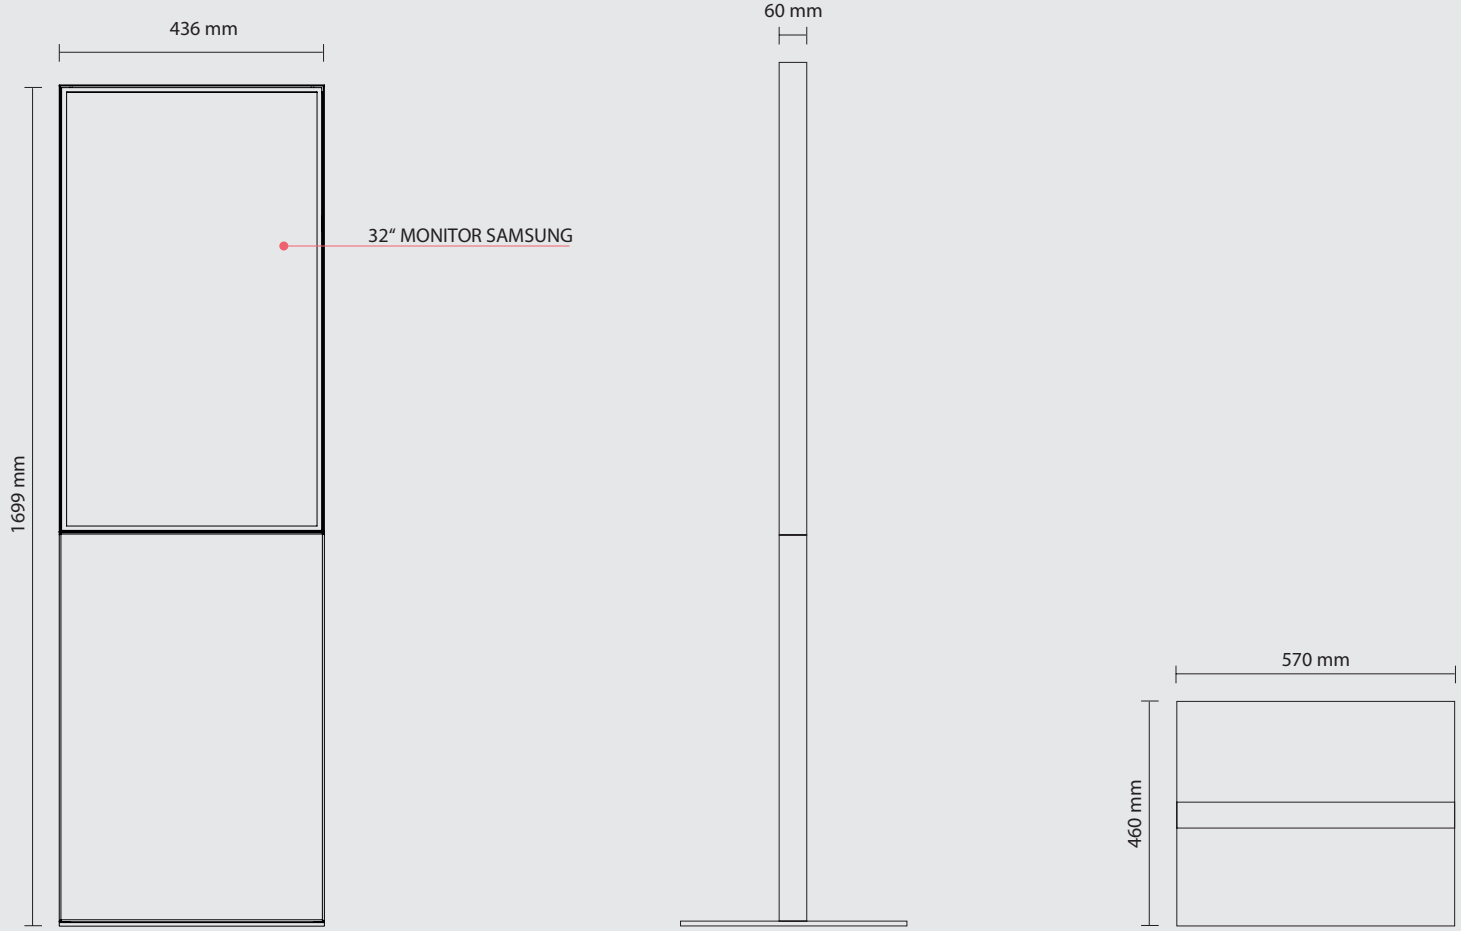

Technische Daten
Technical specification

Panel	Type	60Hz E-LED BLU
	Resolution	1920x1080 (16:9)
	Pixel Pitch(mm)	0.360(H) x 0.360(V)
	Active Display Area(mm)	698.4(H) x 392.85(V)
	Brightness(Typ.)	400nit
	Contrast Ratio(Typ.)	5000:1
	Viewing Angle(H/V)	178:178
	Response Time(G-to-G)	8ms
	Display Colors	10bit Dithering - 1.07Billion
	Color Gamut	72%
	Operation Hour	16/7
	Haze	2%
Display	Dynamic C/R	Mega
	H-Scanning Frequency	30 ~ 81kHZ
	V-Scanning Frequency	48 ~ 75HZ
	Maximum Pixel Frequency	148.5MHz
Connectivity	INPUT RGB	DVI-I(D-Sub Common), Display Port 1.2 (2)
	INPUT VIDEO	HDMI (2)
	INPUT AUDIO	Stereo mini Jack
	INPUT USB	USB 2.0 x 2
	OUTPUT RGB	DP1.2(Loop-out)
	OUTPUT AUDIO	Stereo mini Jack Stereo
	OUTPUT Power Out	N/A
	EXTERNAL CONTROL	RS232C(in/out) thru Stereo
	Tuner	Yes(only for North America)

Power	Type	Internal
	Power Supply	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
	PC Max[W/h]	88
	PC Typical[W/h]	EU 61, US 42, WW 61
	BTU(Max)	300.08
	Sleep mode	less than 0.5W
	Off mode	less than 0.5W
Mechanical Spec	Dimension (mm) Set	721.2 x 415.6 x 29.9
	Dim. (mm)Package	796 X 484 X 132
	Weight (kg) Set	5,6
	Weight (kg) Package	7
	VESA Mount	200x200
	Protection Glass	N/A
	Stand Type	Foot Stand (Optional)
	Bezel Width (mm)	8.9(Even)
Sound	Speaker Type	Built in Speaker(10W + 10W)
Operation	Operating Temperature	0°C~ 40°C
	Humidity	10~80%

Technische Daten
Technical specification

Feature Special	Key	Slim & Light Signage with Built in MagicInfo S4, SSSP 4.0
	H/W	Temperatur, Sensor, Video Wall(15x15(OSD)), Video Wall Daisy Chain(16), Pivot Display, Clock Battery (80hrs Clock Keeping), Built in Speaker (10W x 2), WiFi Module Embedded, Tuner(only for NA), IP5x, Center IR
	S/W	Magic Clone(to USB), Auto Source Switching & Recovery, RS232C/RJ45 MDC,Plug and Play, PIP/PBP, Image Rotation, Button Lock, DP 1.2 Digital Daisy Chain(HDCP Support), Firmware Update by Network, New Home Screen, PC-less VideoWall, Multi Channel, Mobile Control, Event Schedule, Backup Player
Internal Player (Embedded H/W)	Processor	Cortex-A12 1.3GHz Quad Core CPU
	On-Chip Cache Memory	L1 (I/D) : 32KB / 32KB, L2 (Unified) : 1MB
	Clock Speed	1.3GHz CPU Quad
	Main Memory Interface	2.5GB, 3 channel 96bit DDR3-933 (1866MHz)
	Graphics	2D & 3D Graphics Engine : Up to 3840x2160p. 32bpp / Supports OpenGL ES
	Storage (FDM)	8GB (3.75GB Occupied by O/S, 4.25GB Available)
	Multimedia	Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC / VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9 Audio DSP (Decoder) : AC3 (DD), MPEG, DTS and etc.
	IO Ports	USB 2.0
	Operating System	Tizen 2.4 (VDLinux)
Certification	Safety	CB (Europe) : IEC60950-1/EN60950-1 , CCC (China) : GB4943.1-2011 / PSB (Singapore) : PB+IEC60950-1 / NOM (Mexico) : NOM-001-SCFI-1993 , IRAM (Argentina) : IRAM+IEC60950-1 , SASO (Saudi Arabia) : SASO+IEC60950-1 , BIS(India) : IEC60950-1 / IS13252 , NOM(Mexico) : Tuner : NOM-001-SCFI-1993 /Tunerless : NOM-019-SCFI-1998 , KC(Korea) : K 60950-1 , EAC(Russia) : EAC+IEC60950-1 , INMETRO(Brazil) : INMETRO+IEC60950-1 , BSMI(Taiwan) : BSMI+IEC60950-1 , RCM(Australia) : IEC60950-1/AS/NZS 60950-1 , UL(USA) : cUL60950-1 , CSA (Canada) : cUL , TUV (Germany) : CE , NEMKO (Norway) : CE ,

Technische Daten
Technical specification

Certification	EMC	FCC (USA) Part 15, Subpart B Class A , CE (Europe) : EN55022:2006+A1:2007 /EN55024:1998+A1:2001+A2:2003 , VCCI (Japan) : VCCI V-3 /2010.04 Class A , KCC/EK (Korea) : Tuner : KN13 / KN20 /Tunerless : KN22 / KN24 , BSMI (Taiwan) : CNS13438 (ITE EMI) Clas A / /CNS13439 (AV EMI) / CNS14409 (AV EMS) / CNS14972 (Digital) , C-Tick (Australia) : AS/NZS CISPR22:2009 , CCC(China) :GB9254-2008 /GB17625.1-2012 , GOST(Russia/CIS) : GOST R 51317 Series, GOST 22505-97 /EN55022:2006+A1:2007 /EN55024:1998+A1:2001+A2:2003
	Environment	N/A
Accessories	Included	Quick Setup Guide, Regulatory Guide , Warranty Card, Power Cord, Remote Controller, Batteries, RS232C(IN) adapter, Cover Jack
	Optional	Stand: STN-L3240E; Mount: WMN4070SD; Specialty: CML400XJ; Media Player: SBB (Not attachble)